
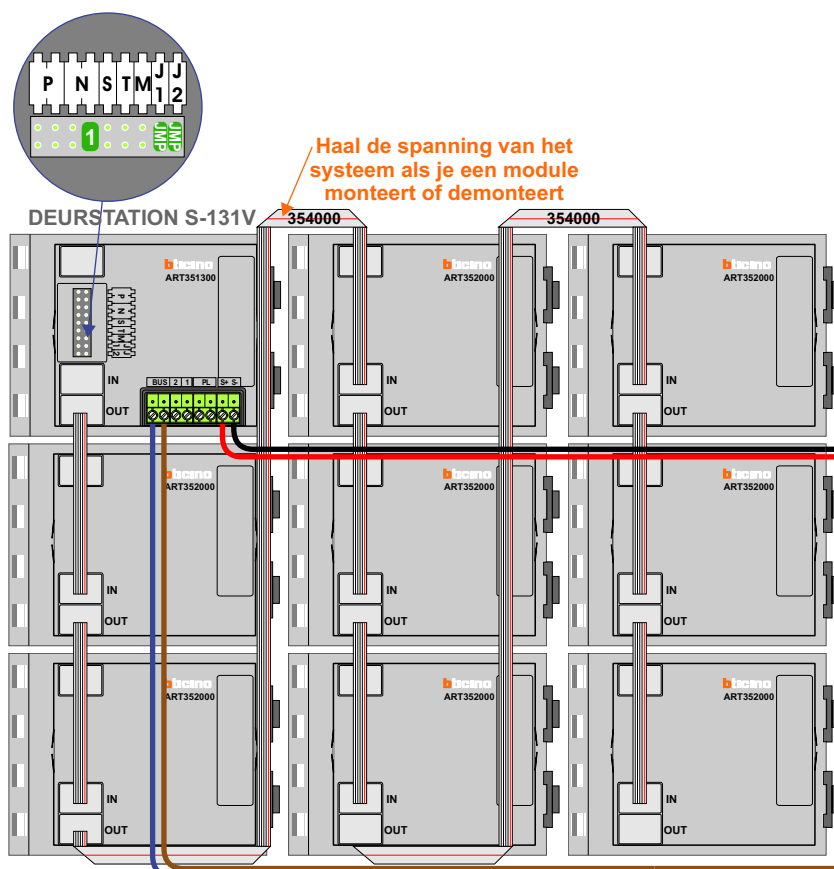
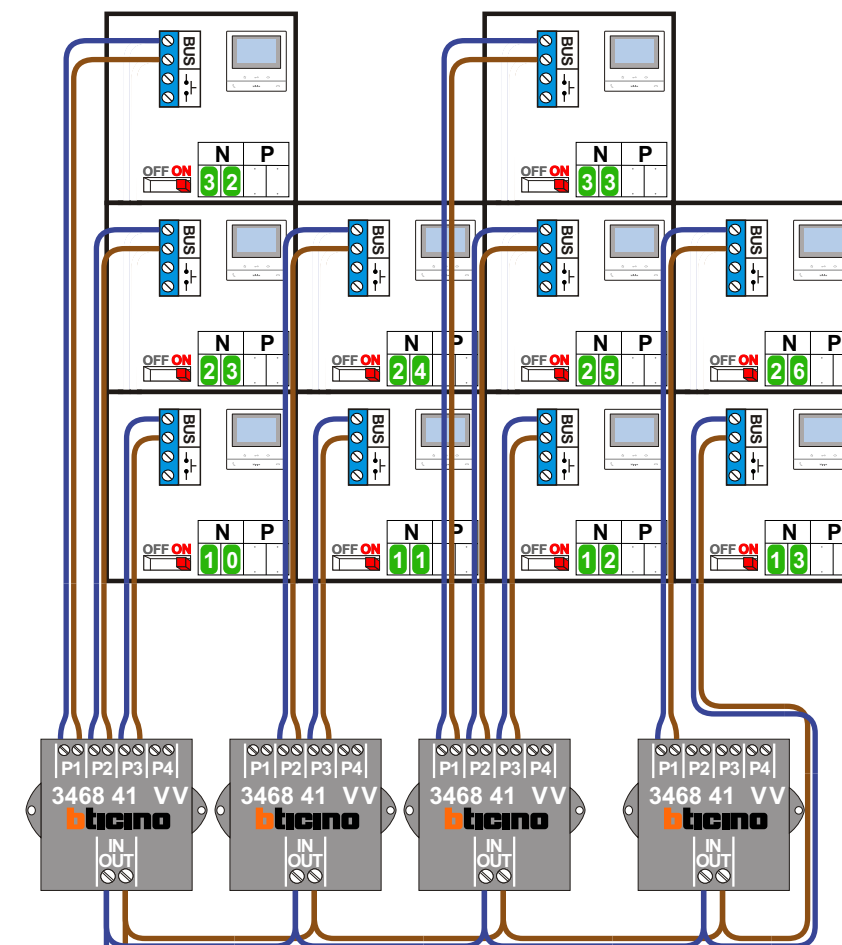
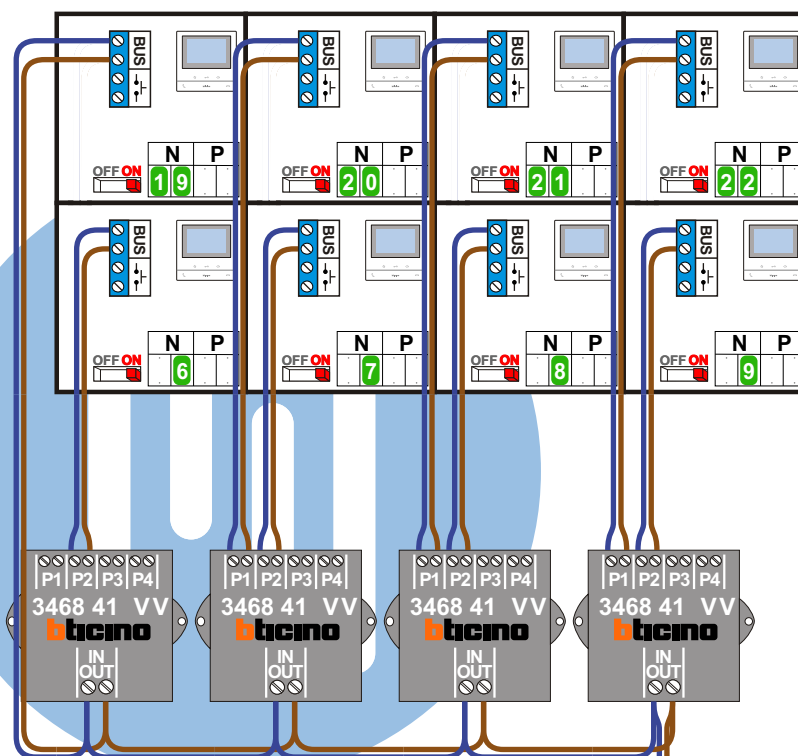



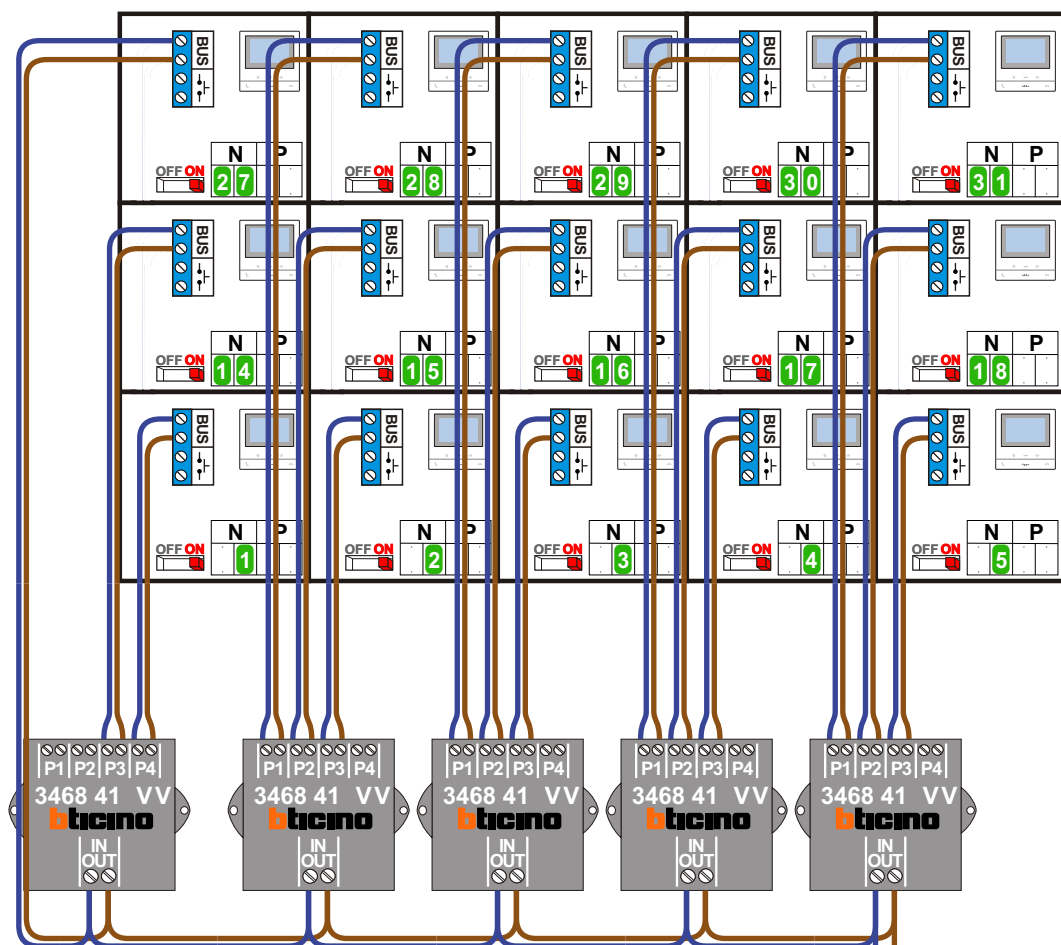


Pot.vrij contact
tbv deuropener

S- S+ C NC NO

Max. 50 meter

Max. 100 meter systeem-
kabel tot laatste videofoon



Max. 2 meter

TWEEDRAADS BUS

Bij monteren/demonteren spanning eraf voorkomt defecten!

DD8 digitzer: flatcable

Connector van flatcable nokje juiste kant op bij aansluiten op DD8

Digitizers & flatcables

Niet monteren/demonteren onder spanning Beldrukkers mogen wel

M-50

De aders moeten echt OP de connector doorgelust worden!

VideoVerdelers

De aders moeten echt OP de klemmen doorgelust worden!

N-Waarde	Huisnummer	Switch-ON
1	61	X
2	63	X
3	65	X
4	67	X
5	69	X
6	71	X
7	73	X
8	75	X
9	77	X
10	79	X
11	81	X
12	83	X
13	85	X
14	87	X
15	89	X
16	91	X
17	93	X
18	95	X
19	97	X
20	99	X
21	101	X
22	103	X
23	105	X
24	107	X
25	109	X
26	111	X
27	113	X
28	115	X
29	117	X
30	119	X
31	121	X
32	123	X
33	125	X

The logo for nelec features the word "nelec" in a large, lowercase, grey sans-serif font. Below it, the words "INTERCOM MADE EASY" are written in a smaller, uppercase, blue sans-serif font. In the top right corner, there is a small table with three rows and one column, containing the numbers 31, 32, and 33. To the left of the table, there is a small diagram of a building facade with a central entrance and windows.